


The New Mini Temperature Data Logger


Efficient, compact and affordable - testo 174




Secure data

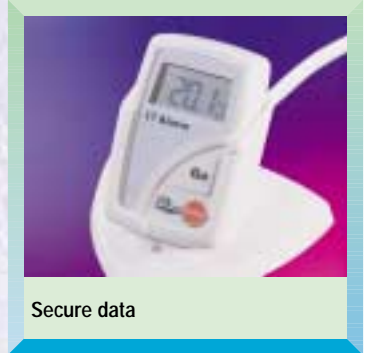

Easy-to-read display



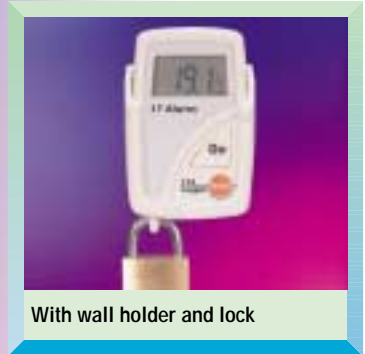


With wall holder and lock

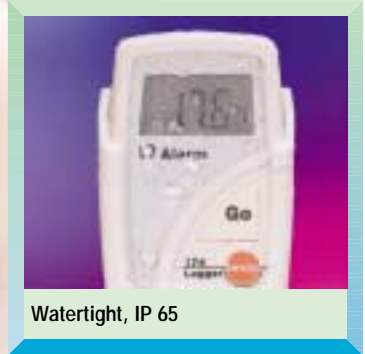

Watertight, IP 65

°F





testo 174

Efficient, compact and easy to use -
the new single channel mini data logger for all types of highly accurate temperature monitoring



... in refrigerated areas



... during transport and in containers



... in storage areas

Benefits which will make your daily work easier - Guaranteed!


- Secure Data - data will not be lost even if battery is dead
- Unique for this price range - large display in a small housing shows current reading, max./min. values, programmed limit values and battery life in days
- The standard battery is easy to change
- Battery life is 500 days (typical)
- Up to 3900 readings can be saved
- A large amount of time is saved by fast data transfer - the entire memory can be read out in only 10 seconds
- Ideal for multiple applications
- Water-tight Protection Class IP65
- User-friendly ComSoft 3 Basic software, compatible with Windows, facilitates graphs and tables, prints data, smooths measurement curves, targeted value observation using crosshair function as well as logger programming and setting of limit values
- Data transfer to PC or Notebook via serial interface, plus an e-mail address can be saved in logger



Technical data

Probe type	NTC Thermistor sensor
No./meas. chann.	1 channel (internal)
Measuring range	-20°F to +160°F
Resolution	0.1°F
Accuracy	+/- 0.8 °F (-20 to -4°F) +/- 0.5°F (-4 to 104°F) +/- 0.8°F (104 to 160°F)
Logger	3900 values
Display	LCD, 1 line
Meas. cycle	1 min to 4h (selectable)
Application temp.	-20°F to +160°F
Storage temp.	-40°F to +160°F
Standard battery	CR 2032 (Lithium)
Battery life	500 days (typical)
Battery change	By user
Housing	Plastic Protection Class IP 65
Dim. (l x w x h)	2" x 1.4" x .5"
Warranty	2 years

Ordering Information

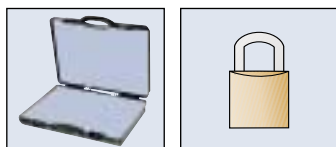

Qty.	Ordering data	Part no.	
①	testo 174 mini temperature data logger incl. wall holder and lock	0563 1741	
②	Starter set with testo 174 mini temperature data logger, ComSoft 3 Basic, wall holder and interface incl. PC connection cable	0563 1742	
③	ComSoft 3 Professional with measurement data management incl. database, analysis and graphics function, data analysis, trend curve	0554 0830	
④	Interface, suitable for testo 174 incl. PC connection cable	0554 1746	
⑤	Transport case for up to 10 testo 174 data loggers and accessories	0516 1740	
⑥	Spare Li battery for 174 data logger	0515 0028	
⑦	NIST calibration certificate/Temperature for temperature data loggers, calibration points -0.4°F, 140°F	0520 0443	

Contact Info

Testo Inc.
35 Ironia Rd.
Flanders, NJ 07836
800-227-0729
973-252-1729 fax
www.testo.com

Information subject to change without notice.

Distributor